


KEY FEATURES

- 1,4" (36 mm) high frequency compression driver
- 4" (100 mm) lightweight aluminum voice coil
- 200 W program power above 500 Hz
- High sensitivity: 112 dB (1W / 1m)
- Integral pure titanium diaphragm
- Aluminium cover
- Neodymium magnet

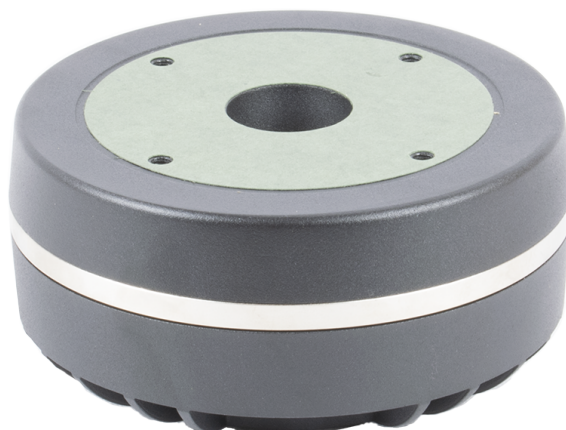

TECHNICAL SPECIFICATIONS

Nominal diameter	36 mm	1,4 in
Rated impedance		8 Ω
Minimum impedance		6,6 Ω
D.C. resistance		5,6 Ω
Power capacity ¹	100 W _{AES} above 0,5 kHz	
	150 W _{AES} above 1,2 kHz	
Program power ²	200 W above 0,5 kHz	
	300 W above 1,2 kHz	
Sensitivity ³	112 dB 1W / 1m @ Z _N	
	coupled to TD-365	


Frequency range	0,5 - 20 kHz
Recommended crossover	0,5 kHz or higher (12 dB/oct min.)
Voice coil diameter	101,6 mm 4 in
Magnetic assembly weight	3,6 kg 7,9 lb
Flux density	2 T
BI factor	16,5 N/A

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.

² Program power is defined as the transducer's ability to handle normal music program material.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz

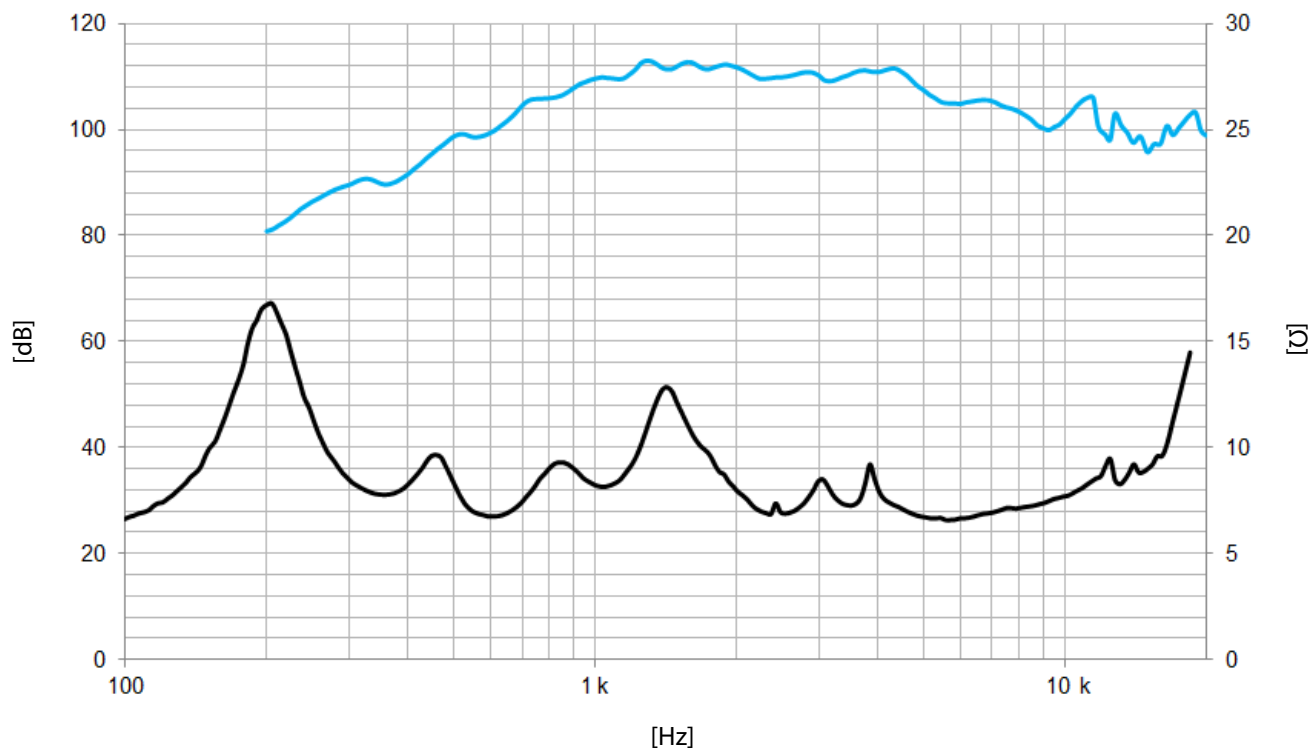

Note: On axis frequency response measured coupled to TD-385 horn in anechoic chamber, 1W / 1m

MOUNTING INFORMATION

Overall diameter	160 mm	6,3 in
Depth	82 mm	3,1 in
Mounting	Four M6 threaded holes, 90° apart on 101,6 mm (4 in) diameter circle	
Net weight	4,3 kg	8,8 lb
Shipping weight	4,8 kg	10,6 lb

DIMENSION DRAWING

