

KEY FEATURES

- 700 W_{AES} power handling capacity
- High sensitivity: 100 dB (1W / 1m)
- Wide usable frequency range
- Low harmonic distortion
- Low power compression losses
- Weatherproof cone with treatment for both sides
- 4" DUO double layer in/out aluminium voice coil
- Conex spider
- Extended controlled displacement: $X_{\max} \pm 7,5$ mm
- 52 mm peak-to-peak excursion before damage



TECHNICAL SPECIFICATIONS

Nominal diameter	300 mm	12 in
Rated impedance		8 Ω
Minimum impedance		6,7 Ω
Power capacity ¹		700 W _{AES}
Program power ²		1.400 W
Sensitivity	100 dB	1W / 1m @ Z _N
Frequency range		50 - 4.000 Hz
Recom. enclosure		V _b = 40 l
(Bass-reflex design)		F _b = 72 Hz
Voice coil diameter	101,6 mm	4 in
BI factor		23,7 N/A
Moving mass		0,074 kg
Voice coil length		20 mm
Air gap height		12 mm
X _{damage} (peak to peak)		52 mm

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.


² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁴ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.

THIELE-SMALL PARAMETERS³

Resonant frequency, f _s	47 Hz
D.C. Voice coil resistance, R _e	5 Ω
Mechanical Quality Factor, Q _{ms}	5,2
Electrical Quality Factor, Q _{es}	0,20
Total Quality Factor, Q _{ts}	0,19
Equivalent Air Volume to C _{ms} , V _{as}	65 l
Mechanical Compliance, C _{ms}	152 μ m / N
Mechanical Resistance, R _{ms}	4,2 kg / s
Efficiency, η_0	3,4 %
Effective Surface Area, S _d	0,055 m ²
Maximum Displacement, X _{max} ⁴	7,5 mm
Displacement Volume, V _d	412 cm ³
Voice Coil Inductance, L _e	0,9 mH

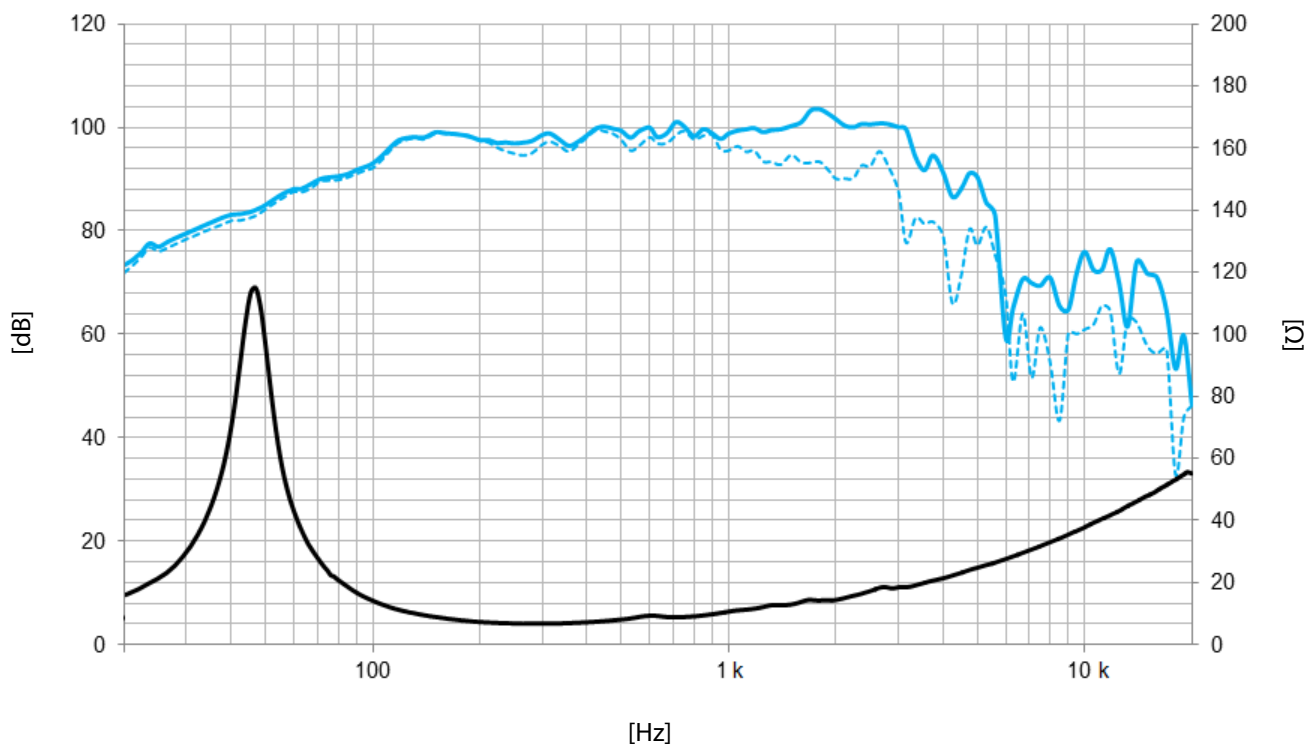

Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

— Frequency response on axis
- - - Frequency response 45° off axis

MOUNTING INFORMATION

Overall diameter	312 mm	12,3 in
Bolt circle diameter	298 mm	11,7 in
Baffle cutout diameter:		
- Front mount	283 mm	11,1 in
Depth	132 mm	5,2 in
Net weight	5,6 kg	12,3 lb
Shipping weight	6,3 kg	13,9 lb

DIMENSION DRAWING

