

KEY FEATURES



- High power handling and low distortion 15" subwoofer
- Exclusive Malt Cross® Technology Cooling System
- Low power compression losses
- High sensitivity: 96 dB (1W / 1m)
- FEA optimized neodymium magnetic circuit
- Ultra low air noise
- Optimized non-linear behaviour
- Exclusive NCR membrane (Neck Coupling Reinforcement)
- Waterproof cone with treatment for both sides
- Double silicone spider
- 4" DUO double layer in/out copper voice coil
- Aluminium demodulating ring
- Extended controlled displacement: $X_{\max} \pm 14,5$ mm
- 65 mm peak-to-peak excursion before damage
- Optimized for direct radiation and band-pass subwoofer applications



TECHNICAL SPECIFICATIONS

Nominal diameter	380 mm	15 in
Rated impedance		8 Ω
Minimum impedance		7,1 Ω
Power capacity ¹		1.600 W _{AES}
Program power ²		3.200 W
Sensitivity	96 dB	1W / 1m @ Z _N
Frequency range		40 - 1.500 Hz
Recom. enclosure		V _b = 90 l
(Bass-reflex design)		F _b = 43 Hz
Voice coil diameter	101,6 mm	4 in
BI factor		25,7 N/A
Moving mass		0,175 kg
Voice coil length		35 mm
Air gap height		14 mm
X _{damage} (peak to peak)		65 mm

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.


² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁴ The $X_{\max}$ is calculated as $(L_{VC} - H_{AG})/2 + (H_{AG}/3,5)$, where L_{VC} is the voice coil length and H_{AG} is the air gap height.

THIELE-SMALL PARAMETERS³

Resonant frequency, f _s	41 Hz
D.C. Voice coil resistance, R _e	5,5 Ω
Mechanical Quality Factor, Q _{ms}	6,6
Electrical Quality Factor, Q _{es}	0,38
Total Quality Factor, Q _{ts}	0,36
Equivalent Air Volume to C _{ms} , V _{as}	91 l
Mechanical Compliance, C _{ms}	84 μ m / N
Mechanical Resistance, R _{ms}	6,8 kg / s
Efficiency, η_0	1,7 %
Effective Surface Area, S _d	0,088 m ²
Maximum Displacement, X _{max} ⁴	14,5 mm
Displacement Volume, V _d	1276 cm ³
Voice Coil Inductance, L _e @ 1 kHz	1,6 mH

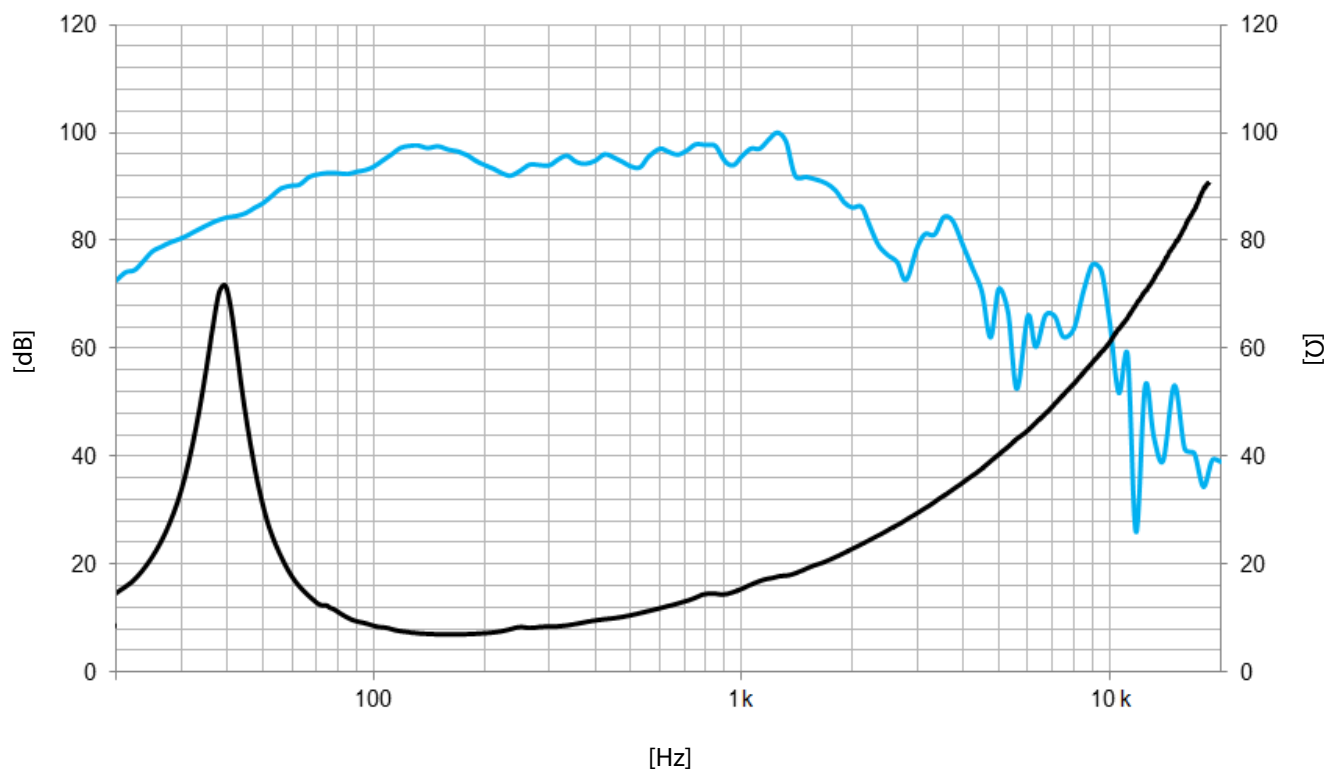

Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	393 mm	15,5 in
Bolt circle diameter	373 mm	14,7 in
Baffle cutout diameter:		
- Front mount	352 mm	13,9 in
Depth	192 mm	7,6 in
Net weight	8,8 kg	19,4 lb
Shipping weight	9,8 kg	21,6 lb

DIMENSION DRAWING

