

KEY FEATURES



- High power handling and low distortion 18" subwoofer
- Exclusive Malt Cross® Technology Cooling System
- Low power compression losses
- High sensitivity: 96 dB (1W / 1m)
- FEA optimized neodymium magnetic circuit
- Aluminium demodulating ring
- Ultra low air noise
- Optimized linear behaviour



- Exclusive NCR membrane (Neck Coupling Reinforcement)
- Weatherproof cone with treatment for both sides
- Double silicone spider
- 4" DUO double layer in/out copper voice coil
- Extended controlled displacement: $X_{\max} \pm 14,5$ mm
- 65 mm peak-to-peak excursion before damage
- Optimized for direct radiation and band-pass subwoofer applications



TECHNICAL SPECIFICATIONS

Nominal diameter	460 mm	18 in
Rated impedance		8 Ω
Minimum impedance		7 Ω
Power capacity ¹	1.600 W _{AES}	
Program power ²	3.200 W	
Sensitivity	96 dB	1W / 1m @ Z _N
Frequency range	35 - 1.000 Hz	
Recom. enclosure	V _b = 180 l	
(Bass-reflex design)	F _b = 37 Hz	
Voice coil diameter	101,6 mm	4 in
BI factor	24,5 N/A	
Moving mass	0,229 kg	
Voice coil length	35 mm	
Air gap height	14 mm	
X _{damage} (peak to peak)	65 mm	

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.


² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁴ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.

THIELE-SMALL PARAMETERS ³

Resonant frequency, f _s	33 Hz
D.C. Voice coil resistance, R _e	5,8 Ω
Mechanical Quality Factor, Q _{ms}	11,4
Electrical Quality Factor, Q _{es}	0,45
Total Quality Factor, Q _{ts}	0,43
Equivalent Air Volume to C _{ms} , V _{as}	231 l
Mechanical Compliance, C _{ms}	104 μ m / N
Mechanical Resistance, R _{ms}	4,1 kg / s
Efficiency, η_0	1,7 %
Effective Surface Area, S _d	0,1255 m ²
Maximum Displacement, X _{max} ⁴	14,5 mm
Displacement Volume, V _d	1820 cm ³
Voice Coil Inductance, L _e @ 1 kHz	1,9 mH

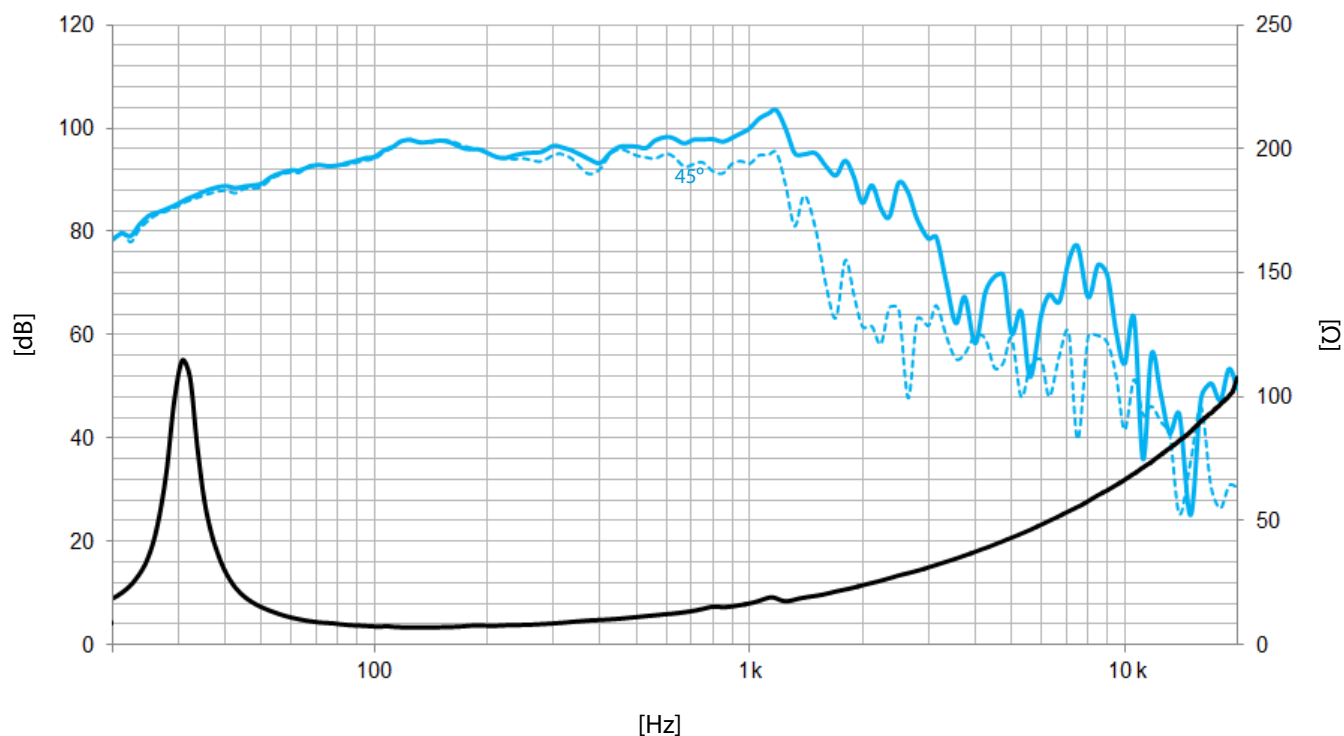

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	462 mm	18,2 in
Bolt circle diameter	441 mm	17,4 in
Baffle cutout diameter:		
- Front mount	426 mm	16,8 in
Depth	234 mm	9,2 in
Net weight	9,5 kg	20,9 lb
Shipping weight	10,8 kg	23,8 lb

DIMENSION DRAWING

