

KEY FEATURES

- Program power: 800 / 180 W_{AES} (LF / HF)
- Sensitivity: 98 / 105 dB (1W / 1m) (LF / HF)
- 4" voice coil woofer
- 2.85" voice coil compression driver
- Common neodymium magnet system design
- Demodulating rings in both LF and HF units
- Composite Titanium / Polyester HF diaphragm
- Weatherproof LF cone
- 60° coverage horn for HF dispersion control



TECHNICAL SPECIFICATIONS

Nominal diameter	380 mm	15 in
Rated impedance (LF/HF)	8 / 16 Ω	
Minimum impedance (LF/HF)	6,6 / 10,9 Ω	
Power capacity ¹ (LF/HF)	400 / 90 W _{AES}	
Program power ² (LF/HF)	800 / 180 W	
Sensitivity (LF/HF ³)	98 dB 1W / 1m @ Z _N	
	105 dB 1W / 1m @ Z _N	
Frequency range	40 - 20.000 Hz	
Recom. HF crossover	1,5 kHz or higher	(12 dB/oct min slope)
Voice coil diameter (LF/HF)	101,6 mm	4 in
	72,4 mm	2,85 in
BI factor		19 N/A
Moving mass		0,084 kg
Voice coil length		16 mm
Air gap height		10 mm
X _{damage} (peak to peak)		28 mm

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.


³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz.

⁴ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁵ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.


THIELE-SMALL PARAMETERS⁴

Resonant frequency, f _s	40 Hz
D.C. Voice coil resistance, R _e	6,6 Ω
Mechanical Quality Factor, Q _{ms}	4,4
Electrical Quality Factor, Q _{es}	0,39
Total Quality Factor, Q _{ts}	0,36
Equivalent Air Volume to C _{ms} , V _{as}	196 l
Mechanical Compliance, C _{ms}	181 μm / N
Mechanical Resistance, R _{ms}	4,9 kg / s
Efficiency, η ₀	3,3 %
Effective Surface Area, S _d	0,088 m ²
Maximum Displacement, X _{max} ⁵	6 mm
Displacement Volume, V _d	350 cm ³
Voice Coil Inductance, L _e	1 mH

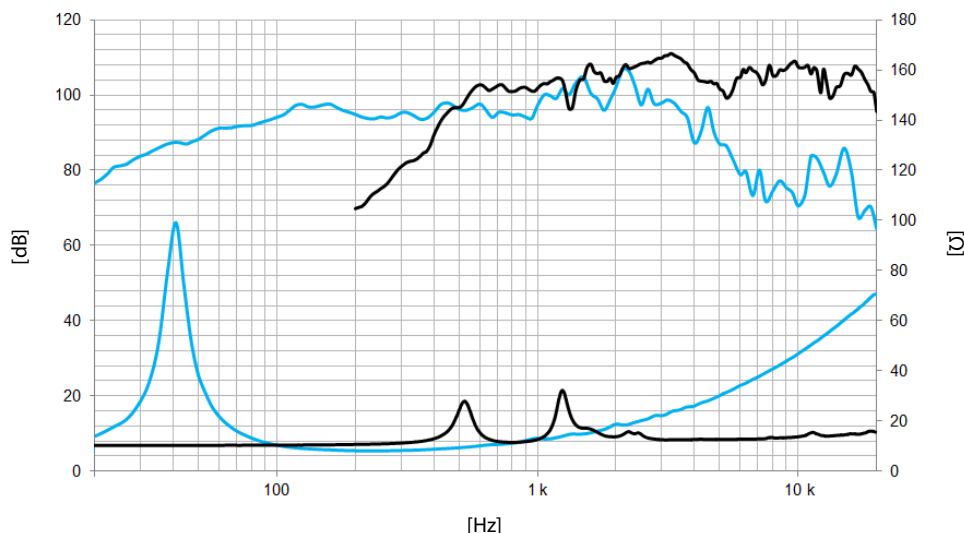


Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

FILTERED FREQUENCY RESPONSE

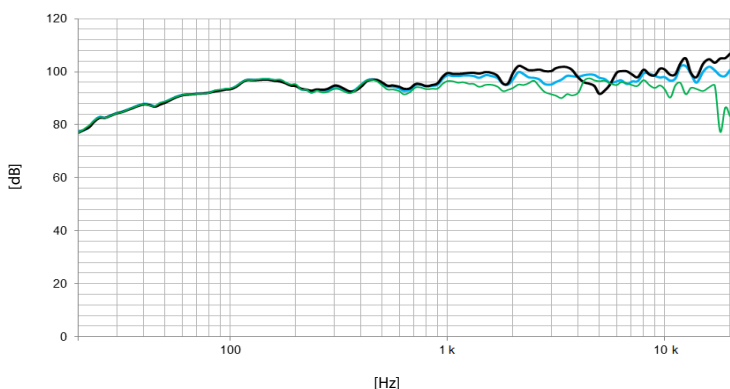

Note: Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m using filter FD-2XA

POLAR PATTERN

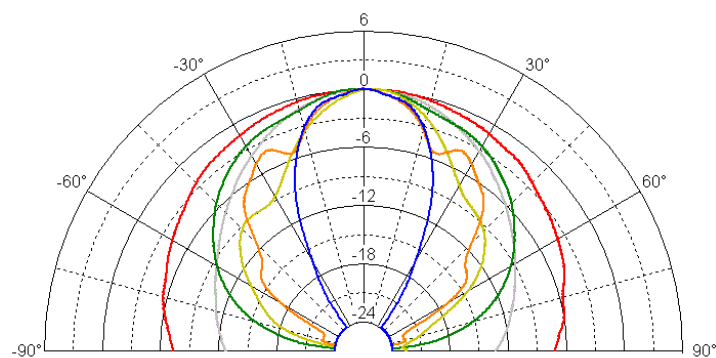

MOUNTING INFORMATION

Overall diameter	388 mm	15,3 in
Bolt circle diameter	370 mm	14,6 in
Baffle cutout diameter:		
- Front mount	352 mm	13,8 in
Depth	182 mm	7,2 in
	7 l	0,25 ft ³
Net weight	7,2 kg	15,9 lb
Shipping weight	8,1 kg	17,9 lb

DIMENSION DRAWING

